ICE CREAM EQUIPMENT SPECIALISTS

ICE CREAM HARDENING CABINETS



Quality, performance and reliability and the design of the Global hardening cabinets have set the industry standard for use in hardening cabinet applications.

The hardening cabinets are available in single door or quad door design. Two of the hardening cabinets' temperature range is 0˚F to -30˚F and the other cabinet is 0˚F to -40˚F.

FEATURES

All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

- 20 gauge steel interior/exterior with white powder coat paint
- Solid foamed insulated doors with heated perimeters and mullion(s)
- Patented Kelvinator refrigeration design guarantees consistent temperature
- Digital Temperature Controller with programmable defrost and LED display
- Auto door switch truns of fans when door opens eliminating frost/icing issues
- Fin coil and forced air evaporator coil improve performance of unit
- Heated drain pan dissipates condensation, no plumbing required

ACCESSORIES

Caster Kit • Shelf Kit • Black Color Option • Stainless Steel Exterior Option


ICE CREAM EQUIPMENT SPECIALISTS
www.ices.cool
sales@ices.cool
Gainesville, FL
(775) 283-8274

ICE CREAM HARDENING CABINETS

TECHNICAL SPECIFICATIONS


MODEL	T30HSP	T50HSQL	T50HSQHP
Temp Range	0°F to –30°F	0°F to –30°F	0°F to –40°F
Exterior Dimensions			
Length	31″	52″	52″
Depth	36.56″	36.125″	36.125″
Height	83.75″	83.75″	83.75″
Electrical	115/60/1	115/60/1	115/60/1
Rated Amps	10.5	12	12
Cubic Feet	27.3	49.1	49.1
Shipping Weight	615 lbs.	854 lbs.	898 lbs.


T30HSP
SIDE VIEW

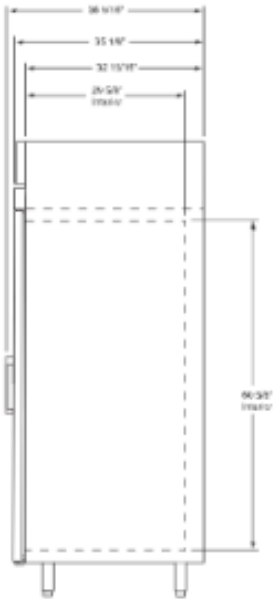

NATURAL REFRIGERANT R290 ECCO FRIENDLY

T50HSQL
T50HSQLHP
SIDE VIEW

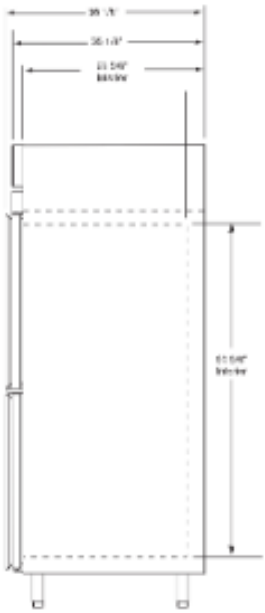




T30HSP
FRONT VIEW



T50HSQL
T50HSQLHP
FRONT VIEW

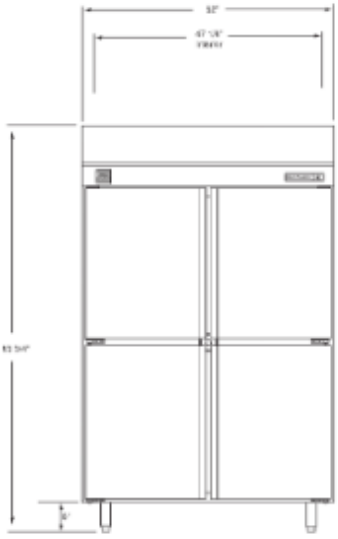

Cabinet designed for optimum performance in air-conditioned area at 70˚F to 75˚F ambient temperature and 50% to 55% relative humidity.
Global Refrigeration, Inc., reserves the right to change specifications, terms and prices without notice.